


SELECTION GUIDE

FREQUENCY METERS & ELAPSED TIME METERS

FREQUENCY METERS

To find Part Number,
fill each X's (1 through 7):

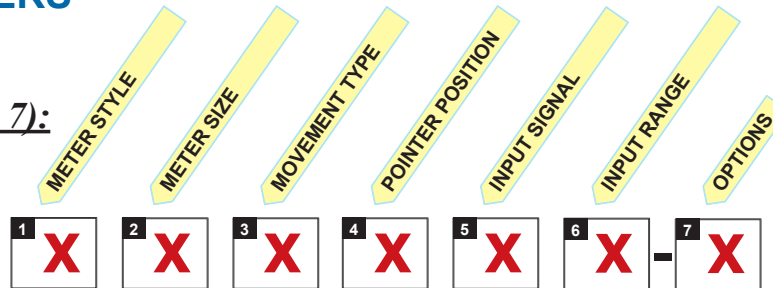

1. Meter Style

- P:** Panel Board
- S:** Surface
- W:** Window

2. Meter Size


- 2:** 2.5"
- 3:** 3.5"
- 4:** 4.5"

3. Movement Type

- P:** Pivot & Jewel
- T:** Taut Band

4. Pointer Position

- L:** Zero Left



5. Input Signal

- HTZ:** Hertz

6. Input Range

- KD:** 45-55
- KL:** 45-65
- LL:** 55-65
- SP:** 380-420

7. Options


(Skip if none selected)

- BD:** Blank Dial
- SD:** Silicon Damping
- HD:** Heavy Damping
- MT:** Special Mounting
- R:** RoHS

ELAPSED TIME METERS



P3ETM



S3ETM

SPECIFICATION

Surface or Panel Board 3 1/2"

Range: 0 to 99,999.99

(Non-resettable reading recycles to 0.)

Power: 120V AC, 60Hz (105V to 130V AC)

Optional 230V AC, 60Hz

Overload: 1.2 Times for 2 Hours

2 Times for 5 Seconds

Operating Temperature: -20° to 65°C